

NITRILE	BLUE, BLACK, WHITE	POWDER FREE	S-XL	AMBIDEXTROUS	NON STERIL
----------------	---------------------------	--------------------	-------------	---------------------	-------------------

Comfortable glove. Offers protection against specific chemical hazards and solvents in sporadic contact. Frequently used in catering and food industry, laboratories, medical and paramedical practices, cleaning and hygiene and DIY.

Characteristics

Suitable for latex allergic people.	Finger textured. Making easy grip.
Powder free, single use, ambidextrous	High durability and resistance.
Rolled Edge, protection against spills.	Flexibility and adaptability.

Packaging

- 100 pieces per dispenser, with a pre-punched opening for hygienic access to the gloves.
- Packaging contains: 10 dispensers of 100 units
- Dimension: 210 x 120 x 60 mm



Labelling Manufacturing date, expiration date, batch number, reference and EAN code. Product name in several languages: Spanish, English, French, German, Italian, Portuguese.

CE marking, protection pictograms, safety standards and legislation. Size, size guide and units.

Standards:

- CE marking PPE Category III according to Regulation (EU) 2016/425.
- CE marking MDD Class I according to Regulation (EU) 2017/745
- Complies with food handling requirements of Regulation (EU) 10/2011
- ASTM F1670 and F1671 (penetration by blood and blood-borne pathogens).
- EN ISO 374-1:2016/A1:2018
- EN ISO 374-2:2019,
- EN ISO 374-4:2019
- EN 16523-1:2015+A1 (method)
- EN ISO 374-5:2016, with penetration test for blood-borne pathogens ISO 16604:2004
- EN 420:2003+A1:2009
- EN ISO 21420:2020
- EN 455-1-2-3-4

Chemical resistance:**PERMEATION (EN ISO 374-1:2016/A1.2018, type B)**

Gloves are classified in terms of time of passage, according to each individual chemical for which the glove resists permeation:

CHEMICALS	LEVEL	LETTER
40 PER CENT SODIUM HYDROXIDE	6	K

Performance Level:

Time (min)	> 10	> 30	> 60	> 120	> 240	> 480
Performance Level	1	2	3	4	5	6

DEGRADATION

Degradation % (DR) is determined for each chemical used in the permeation tests.

(DR) K: 40% Sodium Hydroxide = 43,26%

The “Gentle Touch Nitrile”, nitrile glove PPE should be used to protect the user’s hand against chemical risks (products and levels mentioned above) and against microbiological risks (bacteria, fungi and virus).

The present PPE should never be used against other risks than those described above. The use of his PPE should be evaluated correctly depending on the place of work.

EN ISO 374-1:2016/A1:2018
type B

EN ISO 374-5:2016



K



VIRUS




CAT III

0161

GLOVE SIZES		S	M	L	XL
Palm width	±5 mm	85	95	105	115
Length (minimal)	mm	240	240	240	240
Palm thickness	±0,02 mm	0.07	0.07	0.07	0.07
Finger thickness	±0,02 mm	0.11	0.11	0.11	0.11
Cuff thickness	± 0,02 mm	0.06	0.06	0.06	0.06
Weight	± 0,3 g	3.2	3.5	3.9	4.2



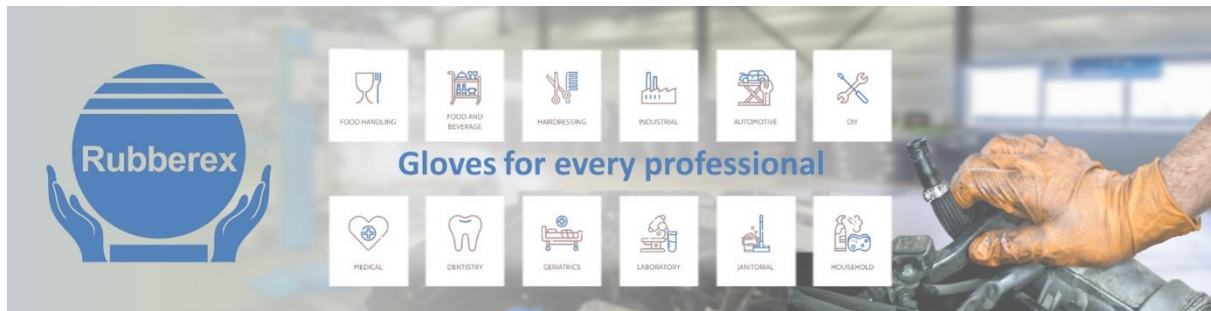

Made by Rubberex

